



# DirectTex® Artist Mambo®

Fields of application

**.02 .04 .05 .07**

## Specifications

-  **REF.** 564160 137
-  100 % polyester  
weave fabrics  
PVC-free, recyclable
-  ca. 160/ 252/ 320/ 505 cm  
ca. 63/ 99/ 126/ 199 inch  
other widths available on request
-  B-s1, d0 DIN EN 13501-1  
NFPA 701
-  ca. 170 g/m<sup>2</sup>  
ca. 5.0 oz/yd<sup>2</sup>
-  ca. 0.25 mm  
ca. 250 µm
-  rolls  
50/ 100 m  
55/ 109 yd
-  coated side: 7  
uncoated side: 6-7  
DIN EN ISO 105-B02
-  warp: 0.8 %  
weft: 1.6 %  
DIN EN 14704-1
-  indirect, direct light
-  Scope 1: 221 g CO<sub>2</sub>/m<sup>2</sup>  
Scope 2: 130 g CO<sub>2</sub>/m<sup>2</sup>
-  cold, heat, ultrasonic cut

-  warp: 1314.1 N  
weft: 1238.6 N  
DIN EN ISO 13934-1
-  warp: 27.9 %  
weft: 32.6 %  
DIN EN ISO 13934-1

## Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside		•	•

## Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,7 %	1,5 %	•
190°C	0,8 %	1,8 %	
200°C	1,2 %	2,7 %	
210°C	1,3 %	2,8 %	

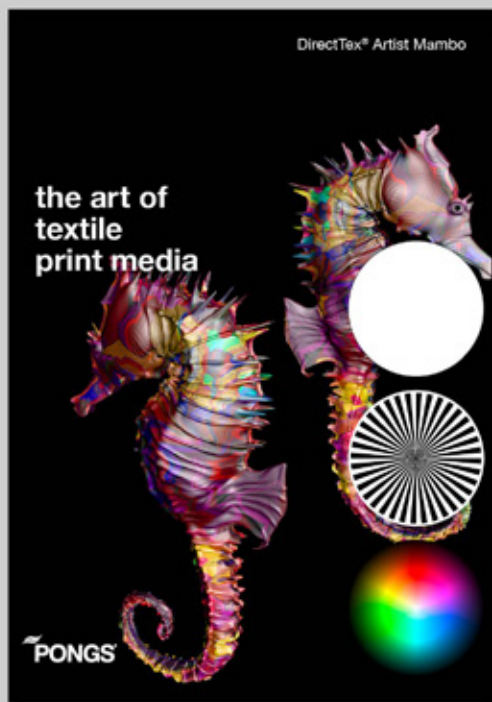
## Certifications



## DirectTex® Artist Mambo®

Fields of application

**.02 .04 .05 .07**



Ref.-Nr.: 564160 137 | Preview print sample