




Pro 16h+

Wide Format Hybrid Inkjet Printer

The **ultimate** wide-format
business tool

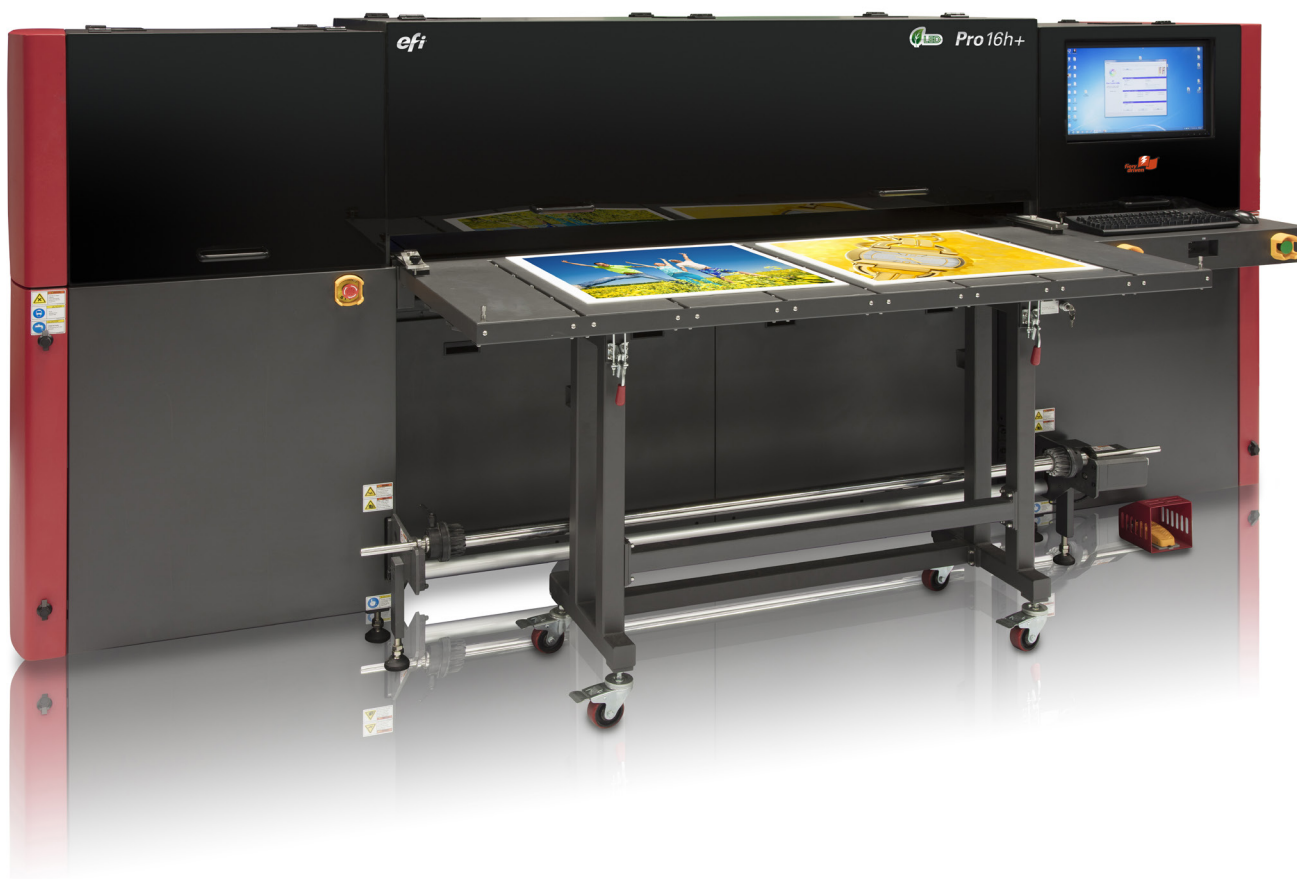

Boost your production + image quality

The EFI™ Pro 16h+ production-level, hybrid flatbed/roll-fed LED inkjet printer is the ultimate business tool if you want to expand into higher-margin wide-format graphics or upgrade your current capabilities. The Pro 16h+ printer delivers outstanding image quality at production speeds up to 50% faster than the original model, white ink, and up to five-layer printing in any colour in a single pass. Plus, new high-performance EFI ProGraphics™+ Series LED Inks print on a wide range of substrates for nearly limitless applications – all while keeping the total cost of ownership low.



+ business growth

Ultimate hybrid production-level printing for faster job turns

- Versatile 165 cm wide hybrid flatbed/roll-fed printer
- Rigid and flexible media support up to 5.08 cm thick with quick and easy changeover
- Production quality printing at 29 m²/hr
- Front and back media pressure rollers for handling a wider range of media
- Semi-continuous board feeding with print job start from the front or back of the printer for easy operation
- Advanced, four-chamber media-platen vacuum system with independent power controls ensures efficient hold down, no media movement, and easy transition between jobs
- Dual movable foot pedal to start the vacuum from any side of the printer
- Quick printer recovery if carriage crashes with media
- Embedded Fiery[®] proServer Core digital front end (DFE) with FAST RIP acceleration technology that eliminates idle print downtime, and RIP and print-on-demand functionality or the ability to print pre-ripped files

Ultimate image quality for increased customer satisfaction

- Four colours plus two white channels come standard
- Resolution up to 1200 x 1200 dpi
- True variable drop greyscale printing with 5pL drop sizes for saturated colours, smooth gradients, and fine text
- Magnetic linear drive control and high-volume ink jetting at an accurate level ensure precise dot placement for sharper lines and text and less overspray

Ultimate capabilities for more applications and higher profits

- CMYK plus EFI best-in-class white ink in opacity and colour gradient
- Multilayer printing in any colour up to five layers in a single pass for more high-value applications
- EFI LED technology for more profit opportunities with the ability to print more premium-margin jobs while lowering your operating costs and environmental footprint:
 - Extends your range of supported substrates to include thinner/lower cost and heat-sensitive speciality media
 - Increases uptime and productivity with instant on/off lamps and less maintenance
 - Drives down operating costs with less energy consumption and fewer consumables
 - Reduces media and ink waste with consistent colour and simple operation
 - Offers a greener print solution with low VOC inks, lower power consumption, less waste, and fewer consumables

Ultimate performance with EFI ProGraphics+ Series LED Inks

- Remarkable open time - eliminating the need to purge or wipe printheads between jobs
- Improved jetting performance increases uptime and reliability
- Improved adhesion, elongation, and water resistance, while retaining the same surface cure as the ProGraphics POP UV inks
- Environmentally friendly: Do not contain heavy metals, virtually no VOC emissions, TPO and THFA free, and formulated to meet EU regulations

TECHNICAL SPECIFICATIONS

Media handling	
Maximum printing width	165 cm
Maximum image width	162.6 cm full-bleed printing
Maximum media thickness	5.08 cm
Four-zone, user-selectable vacuum system	
Maximum rigid and roll media weight:	45.4 kg
Maximum roll diameter:	22.9 cm
Modular table design for scalable rigid printing depth	

Productivity	
Express - 1 pass	129 m ² /hr
Distant - 2 pass	80 m ² /hr
Outdoor - 4 pass	42 m ² /hr
Production - 6 pass	29 m ² /hr
POP - 8 pass	22 m ² /hr
High Quality - 12 pass	15 m ² /hr
Ultra Quality - 16 pass	11 m ² /hr

Environmental conditions	
Compressed air:	Not required
Operating temperature:	18 °C to 27 °C
Humidity:	40% to 80% (non-condensing)
Dimensions (H x W x L) with one set of tables:	348 cm x 241 cm x 163 cm
Weight:	1,235 kg, including tables and rollers 891 kg without peripherals
Electrical:	208-240 VAC, single phase, 50/60 Hz, 30 Amps
Fiery digital front end	
Ships with an embedded Fiery® proServer Core	
Formats	
All popular desktop files formats, including PostScript® 3™, EPS, TIFF, PDF, and RGB/CMYK	