

UTACK

MULTI SURFACE

FOR FLOORS / WALLS / CARPETS

THE PERFECT MULTI SURFACE MATERIAL FOR
INDOOR COMMUNICATION / SHORT TERM OUTDOOR

- ✓ STRUCTURED MATTE FINISH
- ✓ NO OR ALMOST NO ADHESIVE RESIDUE
- ✓ STICKS ON ALMOST ANY SURFACE
- ✓ EASY TO APPLY AND REMOVE
- ✓ SLIP RESISTANT - R12 CERTIFICATE
- ✓ PRINT AND GO - NO LAMINATE SOLUTION
- ✓ DIGITAL CUTTING INTO ANY SHAPE

SUITABLE APPLICATIONS INCLUDE...

- APPLIED ON TOP OF CARPETING, TILES, WOODEN AND PVC FLOORS AND UNTREATED STONE
- WALL GRAPHICS
- DOOR COVERAGE
- TRADESHOWS (EXHIBITION WALLS AND FLOOR)
- BOOTH DISPLAY
- INDOOR/SHORT TERM OUTDOOR – SMOOTH SURFACES

INK COMPATIBILITY: SOLVENT, UV AND LATEX
(FOR LATEX ALLOW 24 HOURS + TO DRY AND CURE)

ROLL OPTIONS:

CODE	WIDTH	LENGTH	WEIGHT
CMY-TEX01	1220mm	25m	385gsm
CMY-TEX01	1220mm	50m	385gsm

DESCRIPTION:

Utack Multi Surface is the ultimate solution for the application on carpet. The product is designed to be used for short to mid term applications dependent on where the product is applied. Utack Multi Surface can be applied on top of carpeting, on walls and most surfaces indoors. The acrylic adhesive is designed to work indoors / short term outdoors.


CMYUK
SPECIALISTS IN SUPERWIDE
DIGITAL PRINT

T. +44 (0) 1189 892929
E. sales@cmyuk.com

F. +44 (0) 1189 892211
W. www.cmyuk.com

UNIT 15 HEADLEY PARK TEN HEADLEY ROAD EAST WOODLEY BERKSHIRE RG5 4SW

CODE: CMY-TEX01
FOR SOLVENT & UV INK

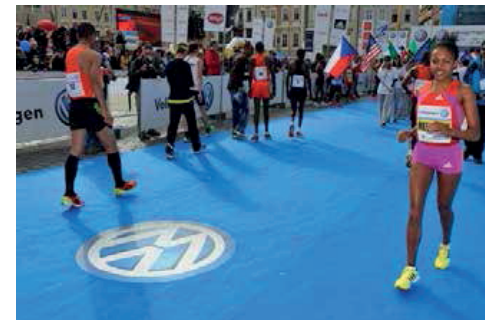

 **B1 FIRE RATED**

TURN OVER
FOR TECHNICAL DATA



MULTI SURFACE

FOR FLOORS / WALLS / CARPETS



DURABILITY:

The durability of Utack Multi Surface is dependent on the way the product has been applied. We recommend a maximum use of 3 month for floor application and 3 - 24 months for walls and non pedestrian application. Furthermore, it also depends on the mechanical use of the surface where it is applied.

STORAGE:

Shelf life is 12 months from the date of delivery. Storage conditions (15 – 24° C - humidity between 40 and 65 % RH).

WARRANTY:

The product has been used in many places under all possible conditions and has proven its reliability and performance. Since there are endless possibilities on how and where the product is going to be applied all product warranty. automatically ends as soon as the liner is removed.

PRINTING METHOD:

The material can be colour printed digital (Solvent, UVC and Latex (please allow 24 hours + to dry and cure)).

RECYCLE:

We recommend to handle the production waste and the used material as industrial waste.

TECHNICAL DATA:

Foil	Fabric with a textured matte vinyl coating (white)
Adhesive	Acrylic solvent
Adhesive Adhesion	80µ +/- 5µ
Adhesive Total weight	385 g/m ²
Adhesive Slip-resistance DIN51130 / BGR 181	R12 / BS7976
Adhesive Minimum application temperature	+10°C / +50°F
Fire Rating	B1

DISCLAIMER:

Due to the unknown conditions of where UTACK will be applied CMYUK cannot guarantee that in all circumstances the material will stay completely intact, and that slight residue or slight surface flake removal may appear. There are many variables that may come into play, such as old paint, age of walls and surfaces, primers and heat. Very rough surfaces are not recommended – On all surfaces we recommend a 24 hour application test before the contract proceeds. Be aware that extreme heat can allow the adhesive to become more tacky – direct sunlight or high heat settings on the print method.



T. +44 (0) 1189 892929
E. sales@cmyuk.com

F. +44 (0) 1189 892211
W. www.cmyuk.com

UNIT 15 HEADLEY PARK TEN HEADLEY ROAD EAST WOODLEY BERKSHIRE RG5 4SW